





# High Density Cooling AIR-STREAM™

New Quick Corner™ Leveler  
Cooling Closer to Rack  
Patented Universal Design  
Adapts Easily and Quickly

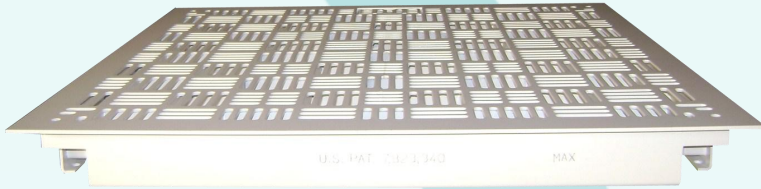

## The Vented Floor Panel that puts a *Freeze* on Cold Aisles

With a massive **55%** open area, **AIR-STREAM** delivers more than twice the cold air volume to the server rack as ordinary perforated tiles. The built in self-retracting lift handle, makes it one of the easiest panels to lift and manage in the data center. A durable epoxy coat (static-dissipative) finish is standard and provides a long-wearing, corrosion resistant finish to ensure years of outstanding service. Optimal supply air temperatures to Lo-Mid-Hi server inlets improves energy efficiency and equipment reliability.

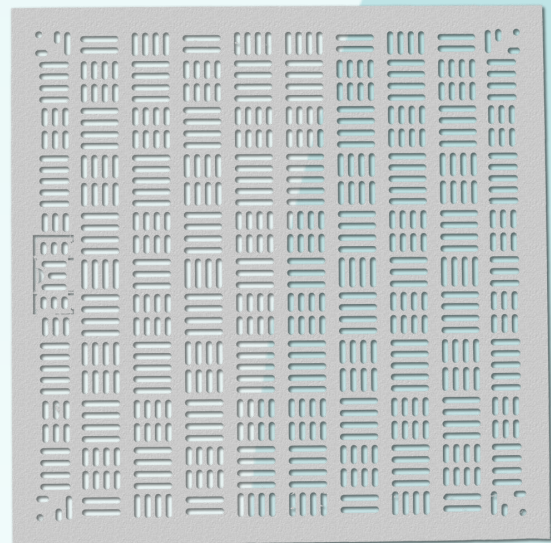

### AIRFLOW CONTROL ACCESSORIES

**Quad Damper Kit** (control range 10 CFM– 1600 CFM)

**FLEX-AIR Intake Hood** (restore positive airflow to servers)

**Infinity® Performance Characteristics \*\***

**U.S. Patents: No. 7,823,340 No. 8,099,912 No. D561,327**

Steel Panel (epoxy finish)	Understructure (wood/steel)	Panel Weight	Design Load	Safety Factor	Ultimate Load	Rolling Load	CFM (.10" H <sub>2</sub> O)	Open Area*
<b>AIRSTREAM™</b>	ANY	7.0 lbs /ft <sup>2</sup>	1500 lbs	>3	5000 lbs	1000 lbs	1100	55%

\* percentage based on available area

\*\* Load performance tests are in accordance with CISCA's recommended test procedures